

Softech Soft Tread Twin Wheel Casters


1-800-215-8220



Grip Ring Stem Models (Black)

Wheel Diameter	Tread Material	Dynamic Load	Mounting Height	Swivel Radius	Part Number	Fastening Selection
50mm	Thermoplastic Elastomer	75	2-1/4"	1-13/16"	PSF50__BK	223, 211, 273
60mm	Thermoplastic Elastomer	100	2-5/8"	2-1/16"	PSF60__BK	223, 211, 273
75mm	Thermoplastic Elastomer	165	3-3/16"	2-1/2"	PSF75__BK	223, 291, 211, 242
100mm	Thermoplastic Elastomer	225	4-5/16"	3-5/8"	PSF100__BK	291, 211
125mm	Thermoplastic Elastomer	225	5-5/16"	4-1/2"	PSF125__BK	291, 211

For brake add [-B] to end of part number. Swivel radius for 50mm is 2-3/8", 60mm is 2-1/2", 75mm is 3-3/16", 100mm is 4-1/2", 125mm is 5-1/8".

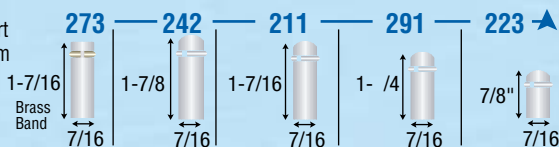


To order include fastener code.
Example:
(PSF75**223**BK)



Grip Ring Stem Models (Grey)

Wheel Diameter	Tread Material	Dynamic Load	Mounting Height	Swivel Radius	Part Number	Fastening Selection
50mm	Thermoplastic Elastomer	75	2-1/4"	1-13/16"	PSF50__GR	223, 211, 273
60mm	Thermoplastic Elastomer	100	2-5/8"	2-1/16"	PSF60__GR	223, 211, 273
75mm	Thermoplastic Elastomer	165	3-3/16"	2-1/2"	PSF75__GR	223, 291, 211, 242
100mm	Thermoplastic Elastomer	225	4-5/16"	3-5/8"	PSF100__GR	291, 211
125mm	Thermoplastic Elastomer	225	5-5/16"	4-1/2"	PSF125__GR	291, 211

For brake add [-B] to end of part number. Swivel radius for 50mm is 2-3/8", 60mm is 2-1/2", 75mm is 3-3/16", 100mm is 4-1/2", 125mm is 5-1/8".

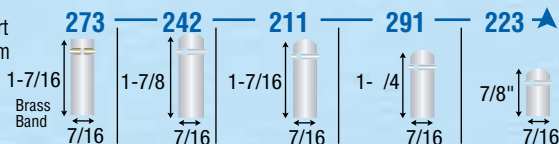

To order include fastener code.
Example:
(PSF75**223**GR)