

Softech Soft Tread Twin Wheel Casters


1-800-215-8220



Swivel Top Plate Models (Black)

Wheel Diameter	Tread Material	Dynamic Load	Mounting Height	Swivel Radius	Part Number	Fastening Selection
50mm	Thermoplastic Elastomer	75	2-3/8"	1-13/16"	PSF50__BK	101
60mm	Thermoplastic Elastomer	100	2-3/4"	2-1/16"	PSF60__BK	101
75mm	Thermoplastic Elastomer	165	3-1/2"	2 1/2"	PSF75__BK	101, 116, 120
100mm	Thermoplastic Elastomer	225	4-5/8"	3-5/8"	PSF100__BK	116, 120
125mm	Thermoplastic Elastomer	225	5-5/8"	4-1/2"	PSF125__BK	116, 120

For brake add [-B] to end of part number. Swivel radius for 50mm is 2-3/8", 60mm is 2-1/2", 75mm is 3-3/16", 100mm is 4-1/2", 125mm is 5-1/8".

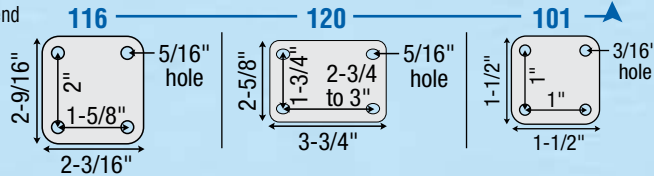


To order include fastener code. Example: (PSF75**101**BK).



Swivel Top Plate Models (Grey)

Wheel Diameter	Tread Material	Dynamic Load	Mounting Height	Swivel Radius	Part Number	Fastening Selection
50mm	Thermoplastic Elastomer	75	2-3/8"	1-13/16"	PSF50__GR	101
60mm	Thermoplastic Elastomer	100	2-3/4"	2-1/16"	PSF60__GR	101
75mm	Thermoplastic Elastomer	165	3-1/2"	2-1/2"	PSF75__GR	101, 120, 116
100mm	Thermoplastic Elastomer	225	4-5/8"	3-5/8"	PSF100__GR	120, 116
125mm	Thermoplastic Elastomer	225	5-5/8"	4-1/2"	PSF125__GR	120, 116

For brake add [-B] to end of part number. Swivel radius for 50mm is 2-3/8", 60mm is 2-1/2", 75mm is 3-3/16", 100mm is 4-1/2", 125mm is 5-1/8".

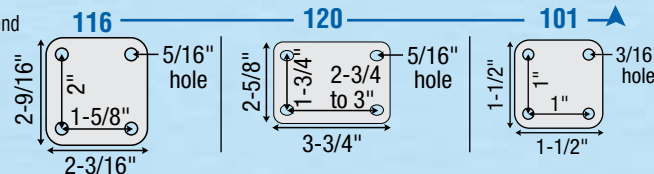

To order include fastener code. Example: (PSF75**101**GR).