

Softech Soft Tread Twin Wheel Casters

1-800-215-8220



Features

- Soft 70-75/A durometer tread constructed of high-tech thermoplastic elastomer
- High load ratings
- Quiet mobility
- Riveted axle for positive wheel retention

Applications

- Electronic Equipment
- Medical Equipment
- Audio/Visual Equipment
- Furniture

Options


Fasteners: Threaded, Top Plate, Grip Ring, Grip Neck

Brake: To order insert [-B] at the end of the Part Number.

Threaded Stem Models (Black)

Wheel Diameter	Tread Material	Dynamic Load	Mounting Height	Swivel Radius	Part Number	Fastening Selection
50mm	Thermoplastic Elastomer	75	2-1/4"	1-13/16"	PSF50__BK	507, 637, 634
60mm	Thermoplastic Elastomer	100	2-5/8"	2-1/16"	PSF60__BK	507, 637, 634
75mm	Thermoplastic Elastomer	165	3-1/4"	2-1/2"	PSF75__BK	507, 637, 634, 741, 748
100mm	Thermoplastic Elastomer	225	4-3/8"	3-5/8"	PSF100__BK	637, 634, 741, 748
125mm	Thermoplastic Elastomer	225	5-7/16"	4-1/2"	PSF125__BK	741, 748

For brake add [-B] to end of part number. Swivel radius for 50mm is 2-3/8", 60mm is 2-1/2", 75mm is 3-3/16", 100mm is 4-1/2", 125mm is 5-1/8".

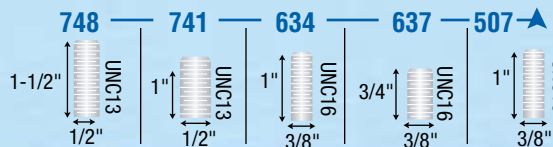


To order include fastener code. Example: (PSF75**507**BK).

Threaded Stem Models (Grey)

Wheel Diameter	Tread Material	Dynamic Load	Mounting Height	Swivel Radius	Part Number	Fastening Selection
50mm	Thermoplastic Elastomer	75	2-1/4"	1-13/16"	PSF50__GR	507, 637, 634
60mm	Thermoplastic Elastomer	100	2-5/8"	2-1/16"	PSF60__GR	507, 637, 634
75mm	Thermoplastic Elastomer	165	3-1/4"	2-1/2"	PSF75__GR	507, 637, 634, 741, 748
100mm	Thermoplastic Elastomer	225	4-3/8"	3-5/8"	PSF100__GR	637, 634, 741, 748
125mm	Thermoplastic Elastomer	225	5-7/16"	4-1/2"	PSF125__GR	741, 748

For brake add [-B] to end of part number. Swivel radius for 50mm is 2-3/8", 60mm is 2-1/2", 75mm is 3-3/16", 100mm is 4-1/2", 125mm is 5-1/8".

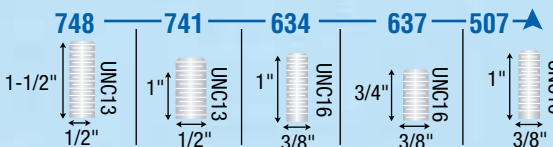

To order include fastener code. Example: (PSF75**507**GR).